



DISTRIBUTION ASSEMBLY Enerbox	
RATED VOLTAGE (V) $V_n = 400$	
RATED CURRENT (A) $I_n = 48$	
RATED FREQUENCY (Hz) $f_n = 50 - 60$	
BREAKING CAPACITY (kA) $I_{cu} =$ $I_{cw} (1s) =$	
PROTECTION DEGREE: IP54	
RATED DIVERSITY FACTORS:	
REFERENCE STANDARD: CEI EN 61439-3	

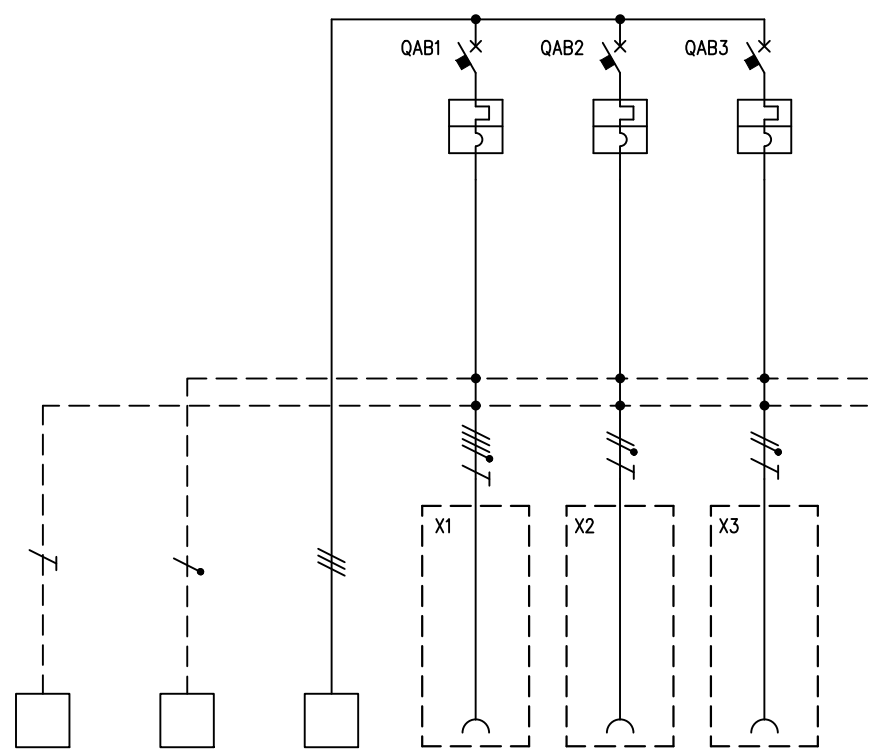

CIRCUIT		1	2	3	4	5	6						
COMPONENTS DESCRIPTION		Terra	Neutro	Alimentazione Quadro									
PROTECTION DEVICES	TYPE				MT	MT	MT						
	Un (V)				400	230	230						
	In (A)				32	16	16						
	N°POLES				3	1	1						
	CHARACTERISTICS				Curva "C"	Curva "C"	Curva "C"						
	BREAKING CAPACITY (kA)												
	Idn (mA)												
PLUGS AND SOCKETS	TYPE				IEC 309	Domo	Domo						
	Un (V)				346-415	200-250	200-250						
	In (A)				32	16	16						
	N°POLES				3P+N+T	2P+T	2P+T						
	CONFIGURATIONS				6h								
	SCAME PART NUMBER				413.3267	570.2561	570.2561						
TERMINALS	N°SECTION (sqmm)	16	16	3x16									
CONNECTIONS	L1, L2, L3, N, PE	PE	N	L1,L2,L3	L1,L2,L3,N,PE	L1,N,PE	L2,N,PE						
	SECTION (sqmm)	10	10	10	4	2,5	2,5						
OTHER COMPONENTS						Schuko	Schuko						

Distribution assembly Enerbox IP54 series

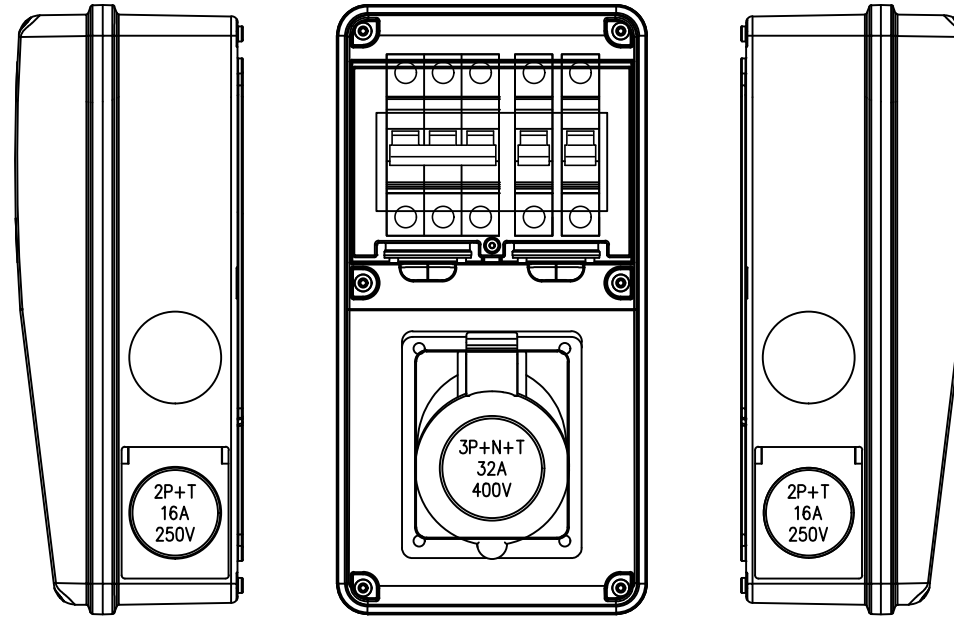

DATE	28/07/2025
DRAWN	S.Facchi
CHECK	F.Verzeroli
APPR.	F.Verzeroli

SCAME
SCAME PARRE S.p.A.

For legal terms we reserve the property of this drawing with interdiction of reproduction and disclosing to third parties or to competitors

AF 3020381_200

AF 3020381

PAGE	2 OF 2
NEXT	

REV.	VERSION	DATE	SIGNATURE
1		2	3